

ReTac[®]


Smooth 75

EASY APPLICATION AND REMOVAL

ReTac[®] Smooth 75 is 75 μ (3 mil), printable white polymeric PVC film coated on one side with ReTac[®] ultra removable adhesive. With ReTac[®] adhesive technology, there is no need to worry about surface damage during graphic removal. ReTac[®] Smooth 75 can be removed and repositioned multiple times without a decrease in bond strength. It has a Class 0 fire rating, making it ideal for use on most indoor surfaces and for applications in public areas that require compliance with strict fire regulations, such as airports, hotels and hospitals.

- IDEAL FOR INTERIOR PROMOTIONS
- PERFECT FOR APPLICATIONS IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS

Product Code: RTM

75 White
micron Phthalate-Free
Polymeric
PVC  Matte



(Eco)Solvent
Latex
UV




ReTac[®] ultra removable
and re-positionable
adhesive



Widths up to 1370mm



INTERIOR AND EXTERIOR
(2 YEAR REMOVABILITY EXTERIOR)

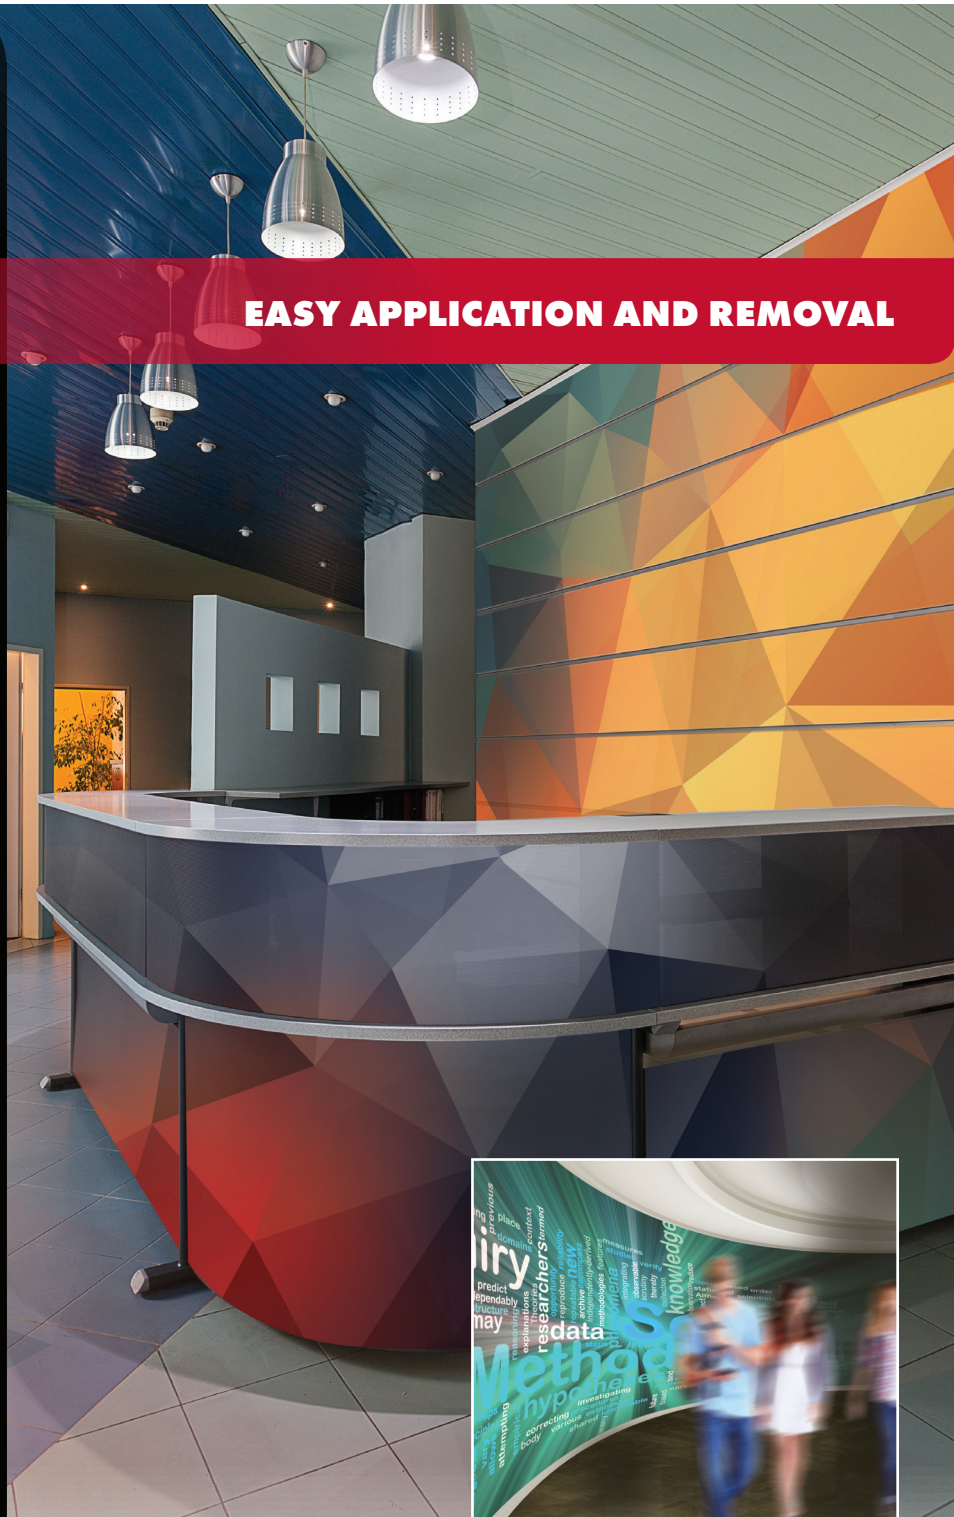

APPLICATIONS

- Curved Surfaces
- Exhibition Graphics
- Interior Décor
- Removable Decals



Certified for
HP Latex Inks

DRYTAC[®]
ADHESIVE SCIENCE

www.drytac.com

ReTac®

Smooth 75

ReTac® Smooth 75 is a 75µ (3 mil) printable matte white, phthalate-free polymeric PVC film, coated on one side with ReTac® ultra removable adhesive. The adhesive is protected by a 135gsm coated Kraft paper release liner. This high quality, ink receptive printable vinyl was specifically developed for easy application and removal of vibrant graphics to a wide range of substrates. ReTac® Smooth 75 can be easily applied, re-positioned and removed without surface damage or loss of adhesion.

- RETAC® IS A PHTHALATE-FREE FILM.
- IDEAL FOR REMOVABLE WALL DECALS, APPLIQUÉS AND WALL MURALS.
- SUITABLE FOR USE ON MOST INDOOR SURFACES, PAINTED WALLS, MELAMINE, AND GLASS.
- RETAC® SMOOTH 75 HAS SEVERAL FIRE RATINGS, MAKING IT PERFECT FOR APPLICATIONS IN PUBLIC AREAS THAT REQUIRE COMPLIANCE WITH STRICT FIRE REGULATIONS, SUCH AS AIRPORTS, HOTELS AND HOSPITALS.

Please Note: Plasticizer migration from some PVC substrates could cause adhesive residue being left behind upon removal, for more information please contact your local representative.

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2023 Drytac Corporation. E&OE. All other trademarks are the property of their respective owners.

05132022

TECHNICAL SPECIFICATION

PRODUCT STRUCTURE

Film	Matte White Polymeric PVC
Adhesive	ReTac® ultra removable and re-positionable adhesive technology
Release Liner	135gsm coated Kraft paper liner

PRODUCT CHARACTERISTICS

Film Thickness	3 mil (75µ)	3.7 mil
Adhesive Layer	0.7 mil (18µ)	(93µ)
Outdoor Durability	5 year; 2 years removability	
Application Temperature	>41°F (5°C)	
Service Temperature Range	40°F to 120°F (4.4°C to 48.9°C)	
Flame Ratings	Class 0 (BS 476 - Part 6 & 7) Class C-s1, d0 (EN 13501-1) PASS (CAN/ULC-S102)	
Shelf Life	2 years	
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity	

OVERLAMINATE RECOMMENDATIONS

When using ReTac® Smooth 75, an overlaminate can be used for maximum life expectancy. Products recommended for use with ReTac® Smooth 75 are Drytac's Weathershield® overlaminates.

DRYTAC®

ADHESIVE SCIENCE

Europe

Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada

30 Driver Road,
Brampton,
Ontario, L6T 5V2,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA

5401 B Eubank Road,
Sandston,
Virginia, 23150,
USA
customerservice@drytac.com
Tel: +1 800.280.6013

www.drytac.com